




Don'ts and Dos for wax bar replacement

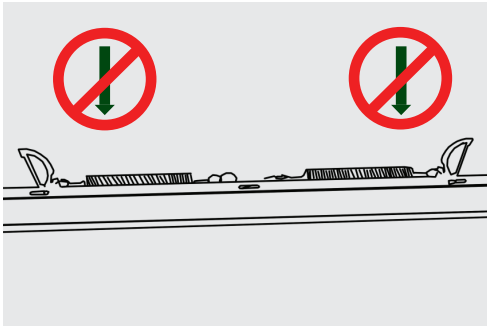

This is a simple process, but don't push the feet toward the wax bar's metal frame. Doing so can cause the feet to break.

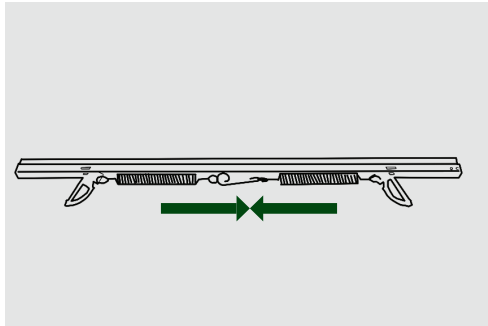

Do disengage the springhook between the two springs. This will allow the feet to lay flat against the wax bar's frame. Remove the springs from the feet.

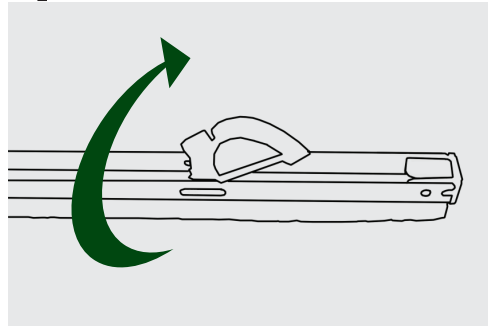

Remove the feet by lifting and turning them. When they reach an angle of approximately 45 degrees, they should slide out easily.

Reverse the process to install the feet and springs on your NA Trading and Technology wax bar.